

- Stud for accelerometer mounting
- Stainless steel 303S31
- -70°C to +200°C range
- 10/32UNF to 1/4-28UNF thread
- Non-isolated



The KMS-1028 is a stud for the direct screw mounting of an accelerometer.


The threads are 10/32UNF and 1/4-28UNF.

The stud can be used in either direction depending on the thread requirements of the mount and accelerometer.

The KMS-1028 can also be used in conjunction with the following mounts as adaptor studs:

KMMAG-21
KMISO-ADH

Recommended mounting torque 1.2Nm

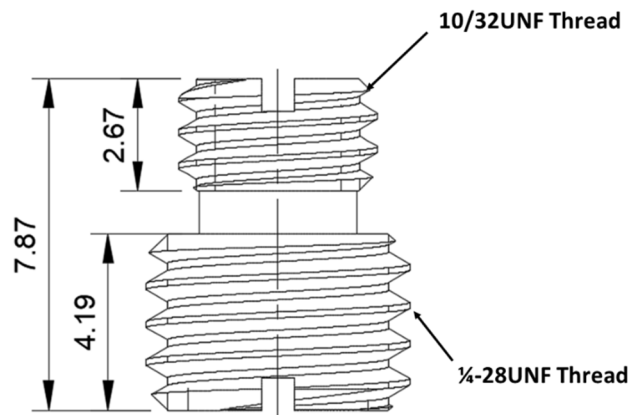

Due to continued product development Kemo Limited reserve the right to change specification without notice.