



- Screened 4 core cable
- FEP Jacket
- -50°C to +200°C range
- Ideal for IEPE accelerometer sensors
- Blue jacket colour
- Nominal diameter 2mm
- 8-36 to 3 x BNC Plug
- Length 5m±5%

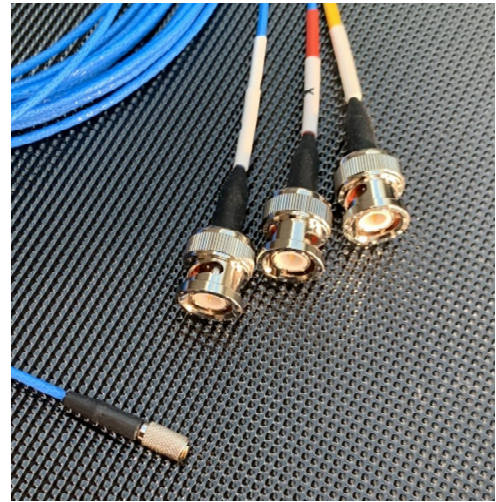

The 12F82-50 is a 5m compatible cable assembly developed for use with a range of triaxial accelerometers that use a miniature 8-36 threaded 4 pin connector. This can be seen typically on triaxial accelerometers such as the 356A30 and 356A22. Although it is also used on a range of other sensors.

Featuring a lightweight 4 core cable of just 2mm diameter which ensures minimal mass loading and return vibration effect on the miniature triaxial accelerometer connected to the cable assembly.

Other cable lengths are available, please enquire for stock availability.

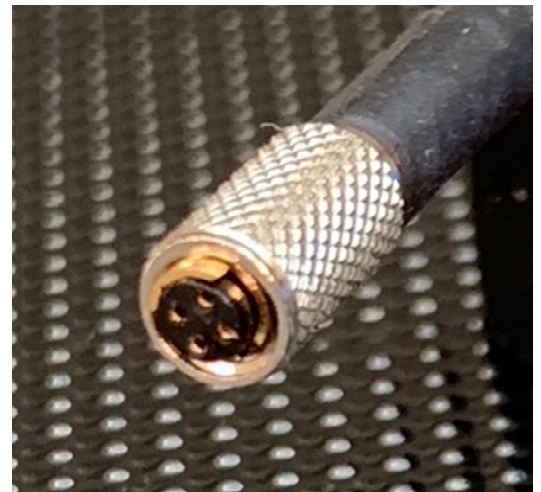

Due to continued product development Kemo Limited reserve the right to change specification without notice.